



H1 BELL HAMMER

LUBRICANT SPRAY

for FOOD MACHINES



For Gear, Bearing
Trouble due abrasion
Reduce Machine Performance and life

High Performance Lubricant H1 BELL HAMMER
Spray "Shoooot"



Miraculous H1 Lubricant

NO PROBLEM for place, dealt with food, factory



for FOOD MACHINES H1 BELL HAMMER

Create the Imagination
SUZUKI KIKOH

www.suzuki-kikoh.com

- Lubricant
- Rustproof
- Dampproof
- Osmosis



H1 BELL HAMMER
SPLAY (420mL)



H1 BELL HAMMER

H1 BELL HAMMER is Food Grade Lubricant Spray formulated high-refined paraffin oil and PTFE in the best balance.

A conventional H1 lubricant has a adhesion performance and penetration performance overwhelm, and exert a great drag in the wear performance and smooth performance.

Please use appropriate amount applied to a variety of food manufacturing machinery and production line.



H1 BELL HAMMER
CARTRIDGE GREASE No.2



H1 BELL HAMMER
Stock Liquid (1000mL)
(undiluted liquid)


SPECIFICATION

NAME	Extra Grade Lubricant
TYPE	Oil
USAGE	Lubricant & Rustproof for Food Machine
Ingredient	Liquid Paraffin, Synthetic Hydrocarbon Oil, PTFE, Antioxidant, etc...

Experience for Miracle Performance

Suprising at High Performance of
H1 BELL HAMMER.

Order me after Consent of High
performance

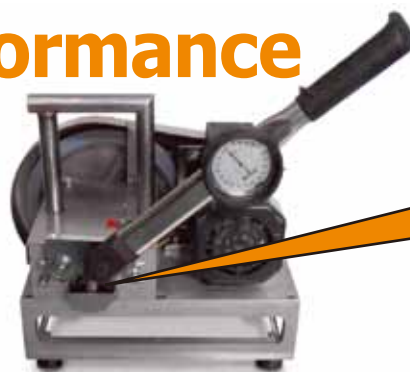

Test to Compare
with Differences
in Wear Scar



Using Other Lube Using H1 BELL HAMMER

H1 BELL HAMMER Comparison list for Oil

Influence on rubber

Kind of the rubber (shortened code)	Kind of the rubber (shortened code)	
Natural Rubber (NR)	Nitrile Rubber (NBR)	⊙
Butadiene Rubber (BR)	Acrylic Rubber (ACM)	⊙
Styrene Rubber (SBR)	Polyurethane Rubber (U)	⊙
Butyl Rubber (IIR)	Silicone Rubber (Si)	⊙△
Ethylene Propylene Rubber (EPM)	Fluoro Rubber (FPM)	⊙

⊙ No or little influence × Influence/ Use ineligible
 ⊙ Endure well used by some, but the conditions are somewhat of influence - Non Data
 △ Not suitable for too much use

Note) Data by the room temperature. Case of high temperatures, should be confirmed by a practical test by the test piece.

Influence on plastic

Kind of plastic (shortened code)	Kind of plastic (shortened code)	
Vinyl Chloride Resin/soft (PVC)	Fluoro-Resin (PTFE)	⊙
Vinyl Chloride Resin/hard (PVC)	Polycarbonate (PC)	⊙
Polystyrene (PE)	Polymethylpentene Resin (TPX)	⊙
ABS (ABS)	polyurethane (PU)	-
Polyethylene (PE)	Phenolic Resin (PF)	⊙
Polypropylene (PP)	Melamine Resin (MF)	⊙
Nylon (PA)	Epoxy Resin (EP)	⊙
Acrylic Resin (PMMA)		⊙

Caution



Brake Clutch system V-Belt

H1 BELL HAMMER
Do not use the belows

1. Brake, Clutch system
2. V-Belt
3. System to use friction / Grip

- Manufacturer

- Seles Agent

SUZUKI KIKOH CO.,LTD.

316-3, Matsuhidai, Matsudo-Si, Chiba, Japan
Zip. 270-2214

TEL. +81-47-385-5311

E-Mail: info@suzuki-kikoh.com

KYOEI SANGYO CO.,LTD.

2-20-4, Shoto, Shibuya-Ku, Tokyo, Japan
Zip. 150-8585

TEL. +81-3-3481-2830

FAX. +81-3-3481-1181

E-Mail: ir-info@kyoei.co.jp

Create the Imagination
SUZUKI KIKOH

www.suzuki-kikoh.com